

Orona 3G X-23

Machine-room above electrical gearless solutions

Compact machine-room solutions mainly designed for existing buildings.

Latest direct drive technology.

The affordable and functional option when a lift with machine room is replaced.

General specifications

Load	225 to 630 kg
Capacity	3 to 8 persons
Speed	1 m/s
Maximum travel	60 m
Maximum floors served	21 floors
Entrances	1 front / 2 open through
Drive system	Regulated gearless
Controller	ARCA III controller, low energy consumption multiprocessor
Door types	Automatic side-opening / Automatic central-opening / Semiautomatic + Articulated (BUS)
Clear door opening	From 500 to 900 mm
Door height	2,000 / 2,100 / 2,200 / 2,300 mm
Car dimensions	Parametric car dimensions
Internal car height	2,100 / 2,200 / 2,300 / 2,400 mm
Aesthetic solutions	Orona 3G Domo Packs / Orona 3G Public Packs / Orona 3G Plus

Standard Optional



1 MACHINE-ROOM

A traditional solution simplifying lift maintenance.



2 DRIVE

Compact, quiet, gearless, energy efficient, speed regulated (VVVF) permanent magnet electric motor.



3 ACCESSIBLE SPACE BELOW THE PIT

Adapts the lift to suit buildings which have an accessible space below the pit (optional).



4 TRACTION ROPES

Orona small diameter ropes replace traditional steel ropes. As a result of their lighter weight, longer lifespan and greater flexibility, it is possible to use a more compact, efficient and eco-friendly gearless machine.



5 DOORS

Compact permanent magnet motor for fast, accurate and quiet door operation giving the most advanced performance. Advanced door opening and full height infra red door protection edges. Optional Solid Door for high flow situations.



6 PARAMETRIC/FLEXIBLE

Flexible car and door configurations ensure available shaft dimensions can be optimised (optional).



7 AUTOMATIC RESCUE SYSTEM

With floor level indication to ensure fast, efficient and safe evacuation of passengers in the event of an emergency. As an option, the system can incorporate a fully-automatic rescue device to evacuate passengers in the event of a power failure.



ECO-EFFICIENCY



ADAPTABILITY



DESIGN AND ACCESSIBILITY



CONTROL AND SAFETY

Standard dimensions*

Load / capacity		Car				Lift shaft ⁰									
						Entrances		Side-opening doors		Central-opening doors HH		HF Pit			HUP Headroom
Persons	Q Load	AC Width	FC Depth	PL Clear opening	Accessibility	No. of entrances	AH ¹	FH ²	AH ¹	FH ³	Std.	Reduced		Std. ⁴	Reduced
							Width	Depth	Width	Depth		With safety space	Without safety space (EN 81-21)		Without safety space (EN 81-21)
4	320 kg	825	1,100	700		1	1,300	1,400	1,250	1,400	1,000	705	285	3,380	3,000
						2x180 ⁰		1,500		1,550					
6	450 kg	1,000	1,250	800	♿	1	1,450	1,550	1,450	1,550					
						2x180 ⁰		1,650		1,700					
8	630 kg	1,100	1,400	900	♿	1	1,600	1,700	1,550	1,700					
						2x180 ⁰		1,800		1,850					
		1,200	1,250	900	♿	1	1,650	1,550	1,650	1,550					
						2x180 ⁰		1,650		1,700					

0 Minimum plumb measurements

1 Accessible space below the pit (counterweight with safety gear) add 50 mm to AH

2 Shaft depth with door tracks projecting 60 mm on the landing

3 Shaft depth with door tracks projecting 40 mm on the landing


4 HUP minimum for internal car height (HC) of 2,100 mm

HH - Four panel central door


* The information is not contractually binding and is subject to the conditions of the shaft

Layout


1 ENTRANCE



2 ENTRANCES (OPEN THROUGH)



VERTICAL SECTION

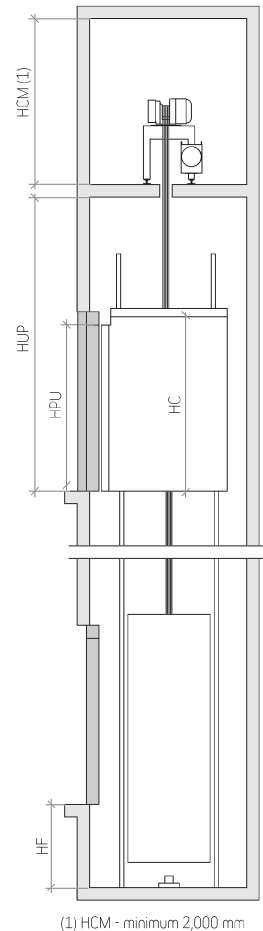

Customised car dimensions

		Car width										Clear door opening													
		8	8	6	5	1,800																			
		8	7	6	5	1,700																			
		8	8	7	5	1,600																			
		8	7	6	5	1,500																			
		8	7	6	5	1,400																			
		8	8	7	6	5	1,300																		
		8	8	7	6	5	1,200																		
		8	8	7	6	5	1,100																		
		8	7	7	6	5	1,000																		
		8	8	7	6	5	900																		
		8	7	7	6	5	800																		
		7	6	6	5	5	700																		
		5	5	5	4	4	600																		
Car depth		1,800	1,700	1,600	1,500	1,400	1,300	1,200	1,100	1,000	900	800	700	600	500	600	700	800	900	1,000	1,100	1,200	1,300	1,400	

Note: Car width and depth variable in increments of 5 mm.

For simplification, table samples show increments of 100 mm.